

ColdLogik

CL23 HPC Rear Door Cooler

ColdLogik Rear Door Coolers are established as highly efficient cooling systems for use on data center/server racks. Designed to operate on a closed loop water circuit, ensuring optimum thermal and energy performance by removing heat generated by the active equipment directly at source.

Designed to meet the challenging demands of High-Performance Compute (HPC) cooling, USystems with its unique RDC has positioned itself alongside water to the chip and immersion cooling technologies, the CL23 HPC which is capable of an unrivalled 200kW of sensible cooling per industry standard rack.

Unlike other high performing cooling technologies, the RDC requires no specialist infrastructure in the data center, no specialist servers, is fitted to standard IT racks, has retrofit capability, only occupies a small footprint, is easy to install and simple to roll out the CL23 HPC is unquestionably cost effective on all levels.

The CL23 HPC by design is capable of controlling the whole room environment without any additional cooling apparatus, unlike equivalent technologies. In addition, this ColdLogik Solution offers significant capital expenditure savings and with an EER in excess of 100 at maximum duty the CL23 HPC provides a better operational expenditure too.



Over 200kW In A Single Rack



We engineer for a sustainable tomorrow.

Performance Examples

Performance examples—these three examples are showing the same RDC but with differing duties attainable when regulating or changing the water temperature. Other performance duties are attainable when calculating bespoke project specific requirements.

Maximum Duty

Our highest duties offer unrivalled High Performance Cooling (HPC) based on 14°C/57.2°F water inlet. This deployment would require the use of mechanically cooled external plant but has the ability to offer exceptional cooling capacities of over 200kW per rack.

Cooling Capacity CL23 HPC		
Maximum Duty	kW	204
Air flow (50Hz 230v)	m ³ /h (cfm)	14229 (8375)
DB Air On	°C (°F)	65 (149)
DB Air Out	°C (°F)	15 (59)
Water In	°C (°F)	14 (57.2)
Water Out	°C (°F)	20 (68)
Volume Fluid Flow	m ³ /h (l/s) / USGal/m	29.38 (8.16) / 129.36
Fluid Velocity	m/s (ft/s)	4.84 (15.88)

Nominal Duty

This is a more general, workable duty with 18°C/64.4°F water inlet and covers most requirements in Europe while also maintaining a room temperature of 20°C/68°F. Operating with wide water ΔT also allows for lower power draw of the mechanically cooled external plant, reducing CapEx and OpEx costs while delivering leading cooling capacities up to 185kW per rack.

Cooling Capacity CL23 HPC		
Nominal Duty	kW	185
Air flow (50Hz 230v)	m ³ /h (cfm)	14229 (8375)
DB Air On	°C (°F)	65 (149)
DB Air Out	°C (°F)	20 (68)
Water In	°C (°F)	18 (64.4)
Water Out	°C (°F)	28 (82.4)
Volume Fluid Flow	m ³ /h (l/s) / USGal/m	15.96 (4.43) / 70.27
Fluid Velocity	m/s (ft/s)	2.63 (8.63)

Efficient Duty

Taking advantage of room temperatures of 26°C/78.8°F allows the use of higher water temperatures, therefore reducing the necessity of mechanical cooling and allows for most or all-day free cooling. This will provide customers with higher efficiency cooling and lower running costs thus beginning to obtain a return on their investment while maximising real estate. The loss in cooling capacity in comparison to the nominal performances is negligible.

Cooling Capacity CL23 HPC		
Efficient Duty	kW	161
Air flow (50Hz 230v)	m ³ /h (cfm)	14229 (8375)
DB Air On	°C (°F)	65 (149)
DB Air Out	°C (°F)	26 (78.8)
Water In	°C (°F)	24 (75.2)
Water Out	°C (°F)	33 (91.4)
Volume Fluid Flow	m ³ /h (l/s) / USGal/m	15.5 (4.31) / 68.24
Fluid Velocity	m/s (ft/s)	2.55 (8.37)

Cooling capacity data is shown for illustration purposes. USystems work alongside their customers who largely have unique challenges and ambitions. The nature of our technology, capabilities and approach is emulated in the delivery of efficient designs and solutions across the globe.

Legend

DB - Dry Bulb

ΔT - Delta T / difference supply and return temperatures


Air On - Air onto coil / air off active equipment

Air Off - Air off coil / air out from ColdLogik cooler

Technical Data

Rear Door Cooler Combined Fan Performance			
10 x Backward Curved Centrifugal			
Air flow	m ³ /h (cfm)	30%	4375 (2575)
		70%	10750 (6327)
		100%	14215 (8367)
Current 50Hz 230v / 60Hz 208v	A	30%	1.32 / 1.46
		70%	7.16 / 7.92
		100%	15.06 / 16.65
Power Input 50Hz 230v	W	30%	113
		70%	776
		100%	1691
Total fan noise	dB	30%	68
		70%	85
		100%	92

CL23 HPC			
Technical information		To Suit 48U	To Suit 52U
Height (A)	mm (inch)	2266 (89)	2444 (96)
Width (B)	mm (inch)	790 (31)	
Depth (C)	mm (inch)	230 (9)	
Dry Weight	kg (lb)	150 (330)	163kg (358)
Wet Weight	kg (lb)	172 (379)	185 (406)
Paint	Finalised on Order	RAL 7035 (Light Grey)	
		RAL 9005 (Black)	
Communication Protocol		MODBus over TCP/IP (BACnet, SNMP optional)	
Hinge Side		Left-Hand side - Standard	
		Right-Hand side - on request	
Connections	mm (inch)	32 (1 1/4)	
Water Volume Capacity	L (USGal)	22 (5.75)	
Maximum RDC Current Draw	A	20.5	

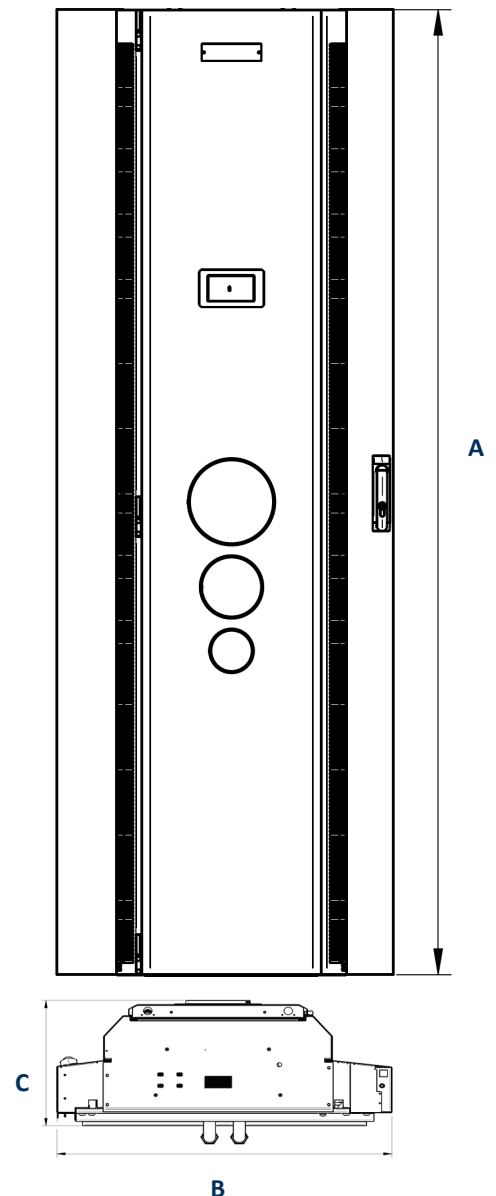

Further Documentation

For additional information, please refer to the below. Available through your USystems representative, or our central enquires line at sales@usystems.com

Complete Product Range

Available at www.usystems.com

Operations and Maintenance Manual

Please contact sales@usystems.com

Troubleshooting Guide

Please contact sales@usystems.com

Product Brochure

Available at www.usystems.com



ColdLogik



We engineer for a sustainable tomorrow.

Europe

Systems House, 235 Amphil Road
Bedford, MK42 9QG, UK

Tel: +44 (0) 1234 761 720

Middle East

Unit 706B, Al Shamsi Building, Al
Nahda 1, Dubai, United Arab
Emirates

Tel: 97 155 998 1198

North America

10 Glenlake Parkway, Suite 130
Atlanta, Georgia, 30328, USA

Tel: 404 334 3607

India

207, 2nd Floor Regus Supreme
(Jayanagar), 44/1, 16th Cross,
Jayanagar, 7th block (west), KR Road,
Bangalore - 560070, India

Tel: 080 6185 2022